



정부기관



창고관리



제조업




우편·택배

XT3-40

4인치 열전사
산업용 라벨 프린터

컴팩트한 디자인과 높은 성능

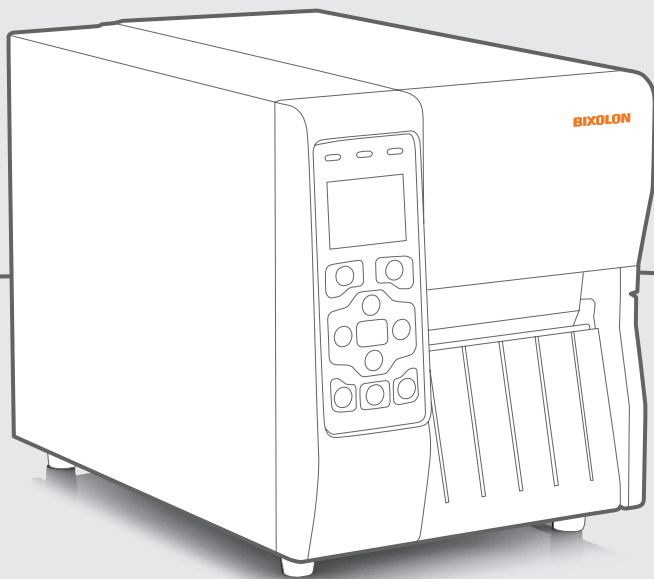

사용자 친화적인 설계

- 견고한 메탈 케이스와 이중 폴딩도어
- 사이드 로딩 방식의 편리한 용지 및 리본 설치
- 2.4인치 풀컬러 LCD 탑재
- 오토커터 및 필러 옵션
- 편리한 롤러 및 프린터 헤드 교체

8
IPS



산업 표준의 우수한 성능

- 8 ips (203mm/sec) 인쇄 속도 지원
- 203, 300 dpi 해상도 옵션
- 주요 프로그래밍 언어와의 높은 호환성
- 듀얼 밴드 WLAN (5GHz & 2.4 GHz)와
듀얼 모드 블루투스 V5.2 (MFi 인증)



안전하고 효율적인 관리

- Twin Functions™: 프린터 셋팅 정보와 데이터를 USB로 복사 이동 가능
- 빅솔론 Label Artist™와 Seagull BarTender® 라벨 디자인 프로그램과 호환
- 빅솔론의 웹 기반 디바이스 관리 툴 XPM™ 지원 (옵션)

XT3-40

4인치 열전사
산업용 라벨 프린터



Standard

Peeler

Auto Cutter

Rewinder + Peeler

Specifications

Printer Specifications

Print Method

Thermal Transfer, Direct Thermal

Print Speed

XT3-40: Up to 8 ips (203 mm/sec)
XT3-43: Up to 6 ips (152 mm/sec)

Print Resolution

XT3-40: 203 dpi
XT3-43: 300 dpi

Print Width

XT3-40 : 108mm
XT3-43 : 105.7mm

Print Length

XT3-40: Up to 4,000 mm
XT3-43: Up to 2,000 mm

Sensor

Transmissive(Adjustable),
Reflective (Adjustable), Ribbon-End,
Head Open

Media Characteristics

Media Type

Gap, Black Mark, Notch, Continuous, Fan-Fold

Media Width

20 ~ 114mm

Media Roll Diameter

Up to 203 mm

Media Thickness

0.06 ~ 0.25 mm

Supply Method

Easy Paper Loading

Inner Core

25.4 ~ 76.2 mm

Ribbon Characteristics

Ribbon Type

Wax, Wax / Resin, Resin, Outside, Inside

Ribbon Width

40 ~ 110 mm

Ribbon Length

Up to 450 m

Core Inner Diameter

25.4 mm

Physical Characteristics

Dimensions (W x D x H)

STD: 240 x 430.5 x 276.7 mm
(9.44 x 16.94 x 10.89 inch)
Rewinder: 240 x 430.5 x 326.7 mm
(9.44 x 16.94 x 12.86 inch)

Weight

STD: 9.3kg (20.5 lbs.)
Rewinder: 11.88kg (26.19 lbs.)

Electrical

EnergyStar Certified,
Internal Power Adaptor 100-240V AC, 50-60Hz

Display

2.4 inch Color TFT LCD

Performance Characteristics

Memory

128 MB SDRAM, 128 MB Flash

Interface

Standard: USB+USB Host+Serial+Ethernet

Optional:

- ① USB + USB Host + Serial + Ethernet + Parallel
- ② USB + USB Host + Serial + Ethernet + Parallel + Bluetooth
- ③ USB + USB Host + Serial + Ethernet + Parallel + WLAN
- ④ USB + USB Host + Serial + Ethernet + Bluetooth
- ⑤ USB + USB Host + Serial + Ethernet + WLAN

Ethernet: 10/100 Mbps

WLAN: 802.11a/b/g/n (Infrastructure, Ad-hoc,
Wi-Fi Direct, SoftAP) - WEP40/104,
WPA1/2 (PSK, EAP)

Bluetooth: V5.2 (MFi certified)

* WLAN & Bluetooth: Dongle type not supported

Real Time Clock

Supported (Standard)

Environment Characteristics

Temperature

Operating: 5 ~ 40°C (41 ~ 104°F)
Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity

Operating: 10 ~ 80% RH
Storage: 10 ~ 90% RH

Software

Emulation

SLCS™, BPL-Z™, BPL-E™

Driver / Utility

Windows Driver (Europlus / Seagull),
Linux / Mac CUPS Driver,
Virtual COM USB / Ethernet Driver,
Utility Program, OPOS / JPOS Driver,
Bartender Ultralite for BIXOLON,
Label Artist-II™, Network Auto Installer,
SAP® Device Driver

SDK / Plugin

Android / iOS / Windows SDK, Linux SDK,
Xamarin SDK, Web Print SDK

Application

Label Artist™ Mobile (Android, iOS),
mPrint App (Android, iOS)

MDM(Optional)

BIXOLON Profile Manager
- XPM™, XCM™ (Windows, Android)

Fonts / Graphics / Symbologies

Fonts

Bitmap Fonts (10 SLCS™, 16 BPL-Z™, 5 BPL-E™),
Scalable Fonts (1 SLCS™, 1 BPL-Z™),
23 Code page,
Unicode supported (UTF-8, UTF-16LE, UTF-16BE)

Graphics

Supporting user-defined fonts, graphics,
formats and logos

Barcode Symbologies

1D: Codabar, Code 11, Code 39, Code 93,
Code 128, EAN-13, EAN-8, Industrial 2-of-5,
Interleaved 2-of-5, Logmars, MSI, Plessey,
Postnet, GS1 DataBar (RSS-14),
Standard 2-of-5, UPC/EAN extensions,
UPC-A, UPC-E, IMB
2D: Aztec, Codablock, Code 49, Data Matrix,
MaxiCode, MicroPDF417, PDF417, QR code,
TLC 39

Accessories

Standard

USB cable

Optional

Peeler, Auto Cutter, Rewind(Liner Take-up only,
Internal, Max.OD 130mm), Serial cable,
Parallel cable

Supplies

Compatible with B-ribbon™